

PVC Refurb Rainwater Outlets

Product Details

Material	PVC
Colour	Light Grey



Introduction

- Pre-formed vertical drop outlets manufactured from injection moulded flexible PVC.
- Available in a wide range of diameters
- Can be pushed into the existing rainwater outlet or downpipe in refurbishment applications where the fins can provide a watertight seal to the inside of the existing outlet.
- Provide a secure hot air welded solution to roof top drainage when used in conjunction with Armourplan membranes.

Features & Benefits

- Good UV resistance and durability
- Excellent mechanical properties and product performance
- Efficient and safe installation
- Secure hot air welded interface


Vertical Drop Outlet Dimensions

Description	Internal Diameter	Base Plate Diameter	Spigot Length
PVC Refurbishment Roof Drain 63mm	45mm	320mm	400mm
PVC Refurbishment Roof Drain 75mm	58mm	330mm	400mm
PVC Refurbishment Roof Drain 90mm	72mm	330mm	400mm
PVC Refurbishment Roof Drain 100mm	80mm	330mm	400mm
PVC Refurbishment Roof Drain 110mm	95mm	385mm	400mm
PVC Refurbishment Roof Drain 125mm	102mm	390mm	400mm
PVC Refurbishment Roof Drain 150mm	128mm	390mm	400mm

Please be advised that the Spigot (or pipe section) on Vertical Drop Armourplan Rainwater Outlets has a number of flexible rings / fins on the outside, in order ensure a tight fit inside the existing Rainwater outlet/downpipe. The dimensions quoted in the item description represent the overall diameter of pipe and fins.

Rainwater Outlet Installation

1. The outlet units should preferably be rebated into the substrate
2. Mechanically fixed systems require additional fasteners beneath the outlet position or around the completed outlet and weathered separately.
3. Connect and seal the Armourplan outlet.
4. Hot air weld the base flange of the outlet to the Armourplan membrane
5. (Optional) Cut a circular membrane apron flashing of Armourplan D / G membrane and hot air weld to the outlet and the membrane.

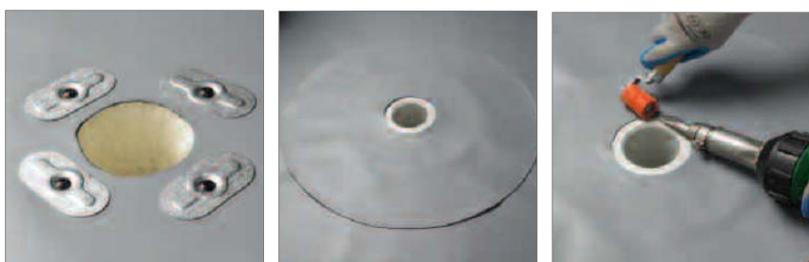

Further Product Information

Full product literature, health & safety and technical sheets are available as downloads from our website: www.ikopolymeric.com or on request by email: polymeric.marketing@iko.com



Whilst every care is taken to see that the information given in this literature is correct and up to date it is not intended to form part of any contract or give rise to any collateral liability, which is hereby specifically excluded. Intending purchasers of our materials should therefore verify with the company whether any changes in our specification or application details or otherwise have taken place since this literature was issued.

Company Registered in England No. 2678296 – Registered Office: Appley Lane North, Appley Bridge, Wigan, Lancashire, WN6 9AB

Iko Polymeric
Coney Green Road
Clay Cross, Chesterfield
S45 9HZ

T: 01257 488000
E: polymeric.technical.uk@iko.com
W: www.ikopolymeric.com